

NIFCO HOLE PLUG



[Push Insert Video](#)


Application

Commonly used to seal holes in body panel from assembly

Features

High sealing performance
Soft material

Wide tolerance for variation in mating hole diameter
Double-sided waterproof available

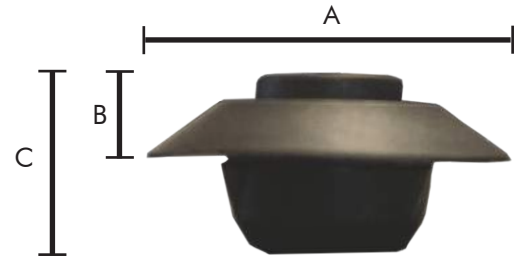

| Part No. | Type | Hole Shape | Hole Size | Thickness | A | B | C | Material 1 | Water Seal |
|----------|------------------------|------------|-----------|-----------|-------|------|------|------------|------------|
| 2P1R | Standard | Round | φ10.0 | 1.2~3.4 | φ20.0 | 3.7 | 12.5 | TPE | Off |
| 04FA | Double-side waterproof | Round | φ13.0 | 0.6~2.4 | φ21.0 | 4.8 | 10.1 | TPE | On |
| 293A | Standard | Round | φ16.0 | 0.75~1.6 | φ21.5 | 2.2 | 6.1 | PE | On |
| 420J | Standard | Round | φ22.0 | 1.0~1.4 | φ30.5 | 2.6 | 6.7 | PE | On |
| 4K23 | Standard | Round | φ23.0 | 0.6~1.2 | φ30.0 | 2.6 | 5.4 | PE | On |
| 1D22 | Standard | Round | φ25.0 | 0.6~1.2 | φ33.5 | 3.6 | 7 | PE | On |
| 21G6 | Standard | Screw/Nut | M6 | 5.8~6.2 | φ16.0 | 2.4 | 15.9 | PE | Off |
| 15F5 | Standard | Round | φ7.0 | 0.6~1.8 | φ15.0 | 3 | 7.5 | PE | Off |
| 3F67 | Standard | Round | φ8.0 | 0.6~1.2 | φ16.0 | 3 | 7.5 | PE | On |
| 1T2J | Standard | Round | φ8.0 | 1.3~2.3 | φ14.0 | 3 | 6.3 | TPE | On |
| 09EZ | Double-side waterproof | Round | φ10.0 | 0.5~5.0 | φ17.0 | 7.45 | 10.5 | TPE | On |
| 3F68 | Standard | Round | φ10.0 | 0.6~1.2 | φ18.0 | 3 | 7.5 | PE | On |
| 369Y | Standard | Round | φ11.0 | 0.6~1.8 | φ19.0 | 3 | 7.5 | PE | On |
| 1T63 | Standard | Round | φ12.0 | 0.8~1.2 | φ20.6 | 3.65 | 7 | PE | Off |
| 10DA | Standard | Round | φ13.0 | 0.5~3.2 | φ17.0 | 4.3 | 9.7 | TPE | On |
| 26X2 | Standard | Round | φ13.0 | 1.8~2.0 | φ22.0 | 2.6 | 6.2 | PE | On |
| 0F6A | Standard | Round | φ15.0 | 0.6~1.2 | φ23.5 | 3 | 7 | TPE | On |
| 247K | Standard | Round | φ15.0 | 0.6~1.8 | φ23.0 | 3 | 7.5 | PE | On |
| 3V2T | Standard | Round | φ15.0 | 0.6~1.8 | φ23.0 | 3 | 7.5 | PE | On |
| 1G70 | Standard | Round | φ15.0 | 0.8~1.2 | φ23.5 | 3.6 | 7 | PE | On |
| 456A | Standard | Round | φ15.0 | 0.8~1.2 | φ24.0 | 2.6 | 5.4 | PE | Off |
| 4R13 | Standard | Round | φ17.0 | 1.8 | φ25.5 | 3.9 | 8.9 | PE | On |
| 09FA | Double-side waterproof | Round | φ18.0 | 0.5~4.0 | φ26.5 | 6.6 | 9.8 | TPE | On |
| 1F57 | Standard | Round | φ18.0 | 0.8 | φ26.5 | 3.6 | 8 | PE | On |
| 4A0M | Standard | Round | φ20.0 | 0.6~2.0 | φ28.5 | 3 | 7.9 | PE | On |
| 4272 | Standard | Round | φ20.0 | 0.65~1.2 | φ29.0 | 2.6 | 7.5 | PE | On |
| 1D17 | Standard | Round | φ20.0 | 0.8~1.2 | φ28.5 | 3.6 | 7 | PE | On |
| 3P9A | Standard | Round | φ20.0 | 0.8~1.2 | φ28.5 | 3 | 7 | TPE | On |
| 26X3 | Standard | Round | φ20.0 | 1.8 | φ29.0 | 2.6 | 6.2 | PE | On |



NIFCO HOLE PLUG



[Push Insert Video](#)

Application

Commonly used to seal holes in body panel from assembly


Features

High sealing performance

Soft material

Wide tolerance for variation in mating hole diameter

Double-sided waterproof available

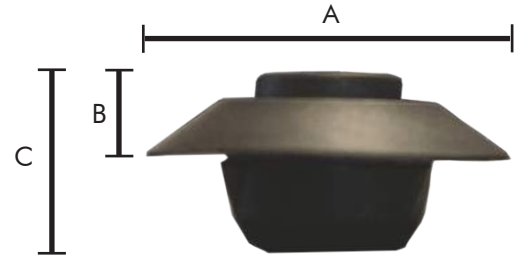

| Part No. | Type | Hole Shape | Hole Size | Thickness | A | B | C | Material 1 | Water Seal |
|----------|------------------------|-------------|------------|-----------|------------|-----|------|------------|------------|
| 06FV | Standard | Round | φ20.0 | 1.8~2.6 | φ27.0 | 2.5 | 7.1 | PE | On |
| 349S | Standard | Round | φ20.4 | 0.6~0.8 | φ25.8 | 3.6 | 7 | PE | Off |
| 4G5E | Standard | Round | φ23.0 | 0.6~1.6 | φ30.0 | 2.5 | 6.1 | PE | On |
| 06JS | Standard | Round slot | φ24.0×38.0 | 7.6~10.8 | φ47.0×61.0 | 6.9 | 17.5 | TPE | On |
| 04FB | Standard | Round slot | φ24.0×57.0 | 0.65~1.8 | φ31.2×64.2 | 4.7 | 8.6 | TPE | On |
| 3S70 | Standard | Round | φ25.0 | 0.6 | φ34.0 | 3.2 | 5.4 | PE | Off |
| 4F6M | Standard | Round slot | φ29.0×38.0 | 0.65~0.75 | φ37.0×46.0 | 2.9 | 5.2 | TPE | On |
| 03GY | Double-side waterproof | Round | φ30.0 | 0.6~2.0 | φ39.0 | 3.1 | 7 | TPE | On |
| 3803 | Standard | Round | φ30.0 | 0.8~1.2 | φ38.5 | 3.6 | 7 | PE | On |
| 4M8K | Standard | Round slot | φ30.0×56.0 | 0.6~1.2 | φ37.5×63.5 | 2.6 | 8.3 | TPE | On |
| 1A0S | Standard | Square slot | □35.0×44.0 | 1.8 | □44.2×53.2 | 3.3 | 7.5 | PE | On |
| 1Q60 | Standard | Round | φ40.0 | 0.8~1.2 | φ48.5 | 3.6 | 7 | PE | On |
| 0Z8J | Standard | Round slot | φ40.0×72.0 | 0.5~1.2 | φ48.5×80.5 | 3.4 | 7 | PE + TPE | On |



Insert



Fixed

