


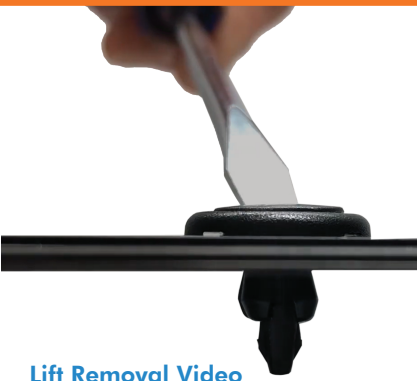


Lift Removal Video

Application

Commonly used for fastening fender panels

Features

- Suitable for wide range of panel thickness
- Fixed firmly
- Higher removal and shearing force

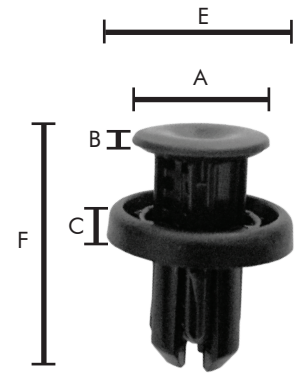

Part Number	Hole Shape	Hole Size	Panel Thickness	A	B	C	E	F	Pin Material	Gommet Maerial
4K2U	Round	φ5.0	2.5~5.0	φ7.4	1	1.9	φ10.0	14.5	PBT	POM
3K0N	Round	φ7.0	1.8~4.0	φ14.0	1.6	2.5	φ20.0	18.5	PBT	POM
3K0V	Round	φ7.0	1.8~5.9	φ13.4	1.4	3.4	φ20.0	15.3	PBT	POM
4N4X	Round	φ7.0	1.8~5.9	φ13.2	2.55	3.9	φ20.0	18.15	PBT	POM
0M1M	Round	φ8.0	1.5~6.1	φ14.0	1.7	2.6	φ18.0	20	Other	POM
3V4G	Round	φ8.0	2.5~5.0	φ11.0	2.1	3.4	φ18.0	14.4	POM	POM
1E2V	Round	φ9.0	3.8~4.8	φ14.0	1.7	3.1	φ18.0	24.9	PBT	POM
3U0R	Round	φ10.0	2.5~6.0	φ13.8	1.4	3.4	φ20.0	19.8	PBT	POM
4B8G	Round	φ7.0	3.0~4.0	φ10.4	1.1	4	φ19.0	17.5	POM	POM
020U	Round	φ8.0	1.5~5.5	φ12.0	1.7	2.6	φ20.0	22	Other	POM
251X	Round	φ8.0	4.2	φ13.0	1.7	2.6	φ16.0	20	Other	POM
047K	Round	φ8.8~9.2	3.8~6.0	φ14.0	1.7	3.1	φ18.0	24.9	PBT	POM
4N6T	Round	φ9.0	4.3~6.4	φ15.5	2.8	3.9	φ22.0	25.8	PBT	POM
280B	Round	φ10.0	3.5~6.0	φ14.0	2.7	3.1	φ21.0	28.5	Other	POM
49T4	Round	φ10.0	4.0~5.5	φ14.0	1.7	3.1	φ18.0	27.5	Other	POM

