

Install and Removal




Application

Commonly used for panel attachment

Features

- Easily removed with a Phillips screwdriver
- High retention force
- firm, secure attachment

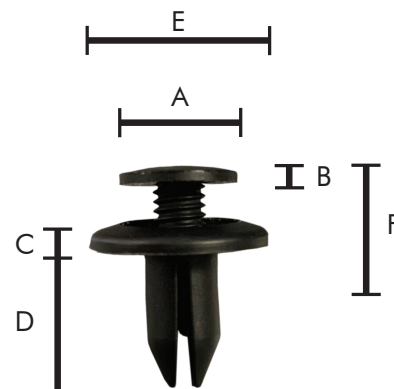

Part No.	HOLE SIZE	THICKNESS	A	B + C	D	E	F	MATERIAL	NOTE
1A79	φ6.0	3.3~6.0	φ8.0	2.6	11.0	φ18.0	14.0	PA6	12 PARTS ARE CONNECTED
4890	φ6.0	3.3~6.0	φ8.0	3	11.0	φ14.0	14.0	PA6	16 PARTS ARE CONNECTED
1L61	φ8.0	4.8	φ13.2	3.5	13.4	φ22.0		PA12 + POM	

